

## PB-1000

## PB-1000 – High Performance Bass, Compact Size, Unbeatable Value

The PB-1000 is our smallest ported cabinet subwoofer, but it makes a big performance statement! Packed with quality components like a long-stroke 10" driver, a 300W Sledge DSP amplifier and a high-flow 3" port, the PB-1000 delivers amazing performance. And with an attractive premium black ash finish, this subwoofer will look great in any home theater. Priced at only \$499 MSRP, the PB-1000 is an outstanding value, and an excellent choice for budget-conscious customers desiring no-compromise SVS performance in a compact and manageable cabinet.




## Specifications:

- Front-firing long-stroke 10" driver
- STA-300D Sledge, 300 watt amplifier
- Premium black ash finish
- Front-firing 3" high-flow port with large radius inner and outer flanges
- Injection-molded grille with black cloth covering
- Rigid and braced MDF cabinet
- 23-200 Hz +/- 3 dB
- Dims: 18.4" (H) x 15" (W) x 18.4" (D)
- Weight: 47 pounds


## Efficient Deep-Bass Performance, Compact Cabinet - Only From SVS

Only SVS has the experience to extract amazing deep-bass performance from such a compact cabinet. The enclosure volume is carefully sized to work synergistically with the deep-tuned, wide-flare 3" port and long-stroke 10" woofer to create excellent deep bass efficiency and extension. Managing this powerhouse is our exclusive and sophisticated Sledge 300W DSP Class D amplifier to ensure the PB-1000 always sounds accurate, dynamic and clean, along with exemplary behavior at the limits.

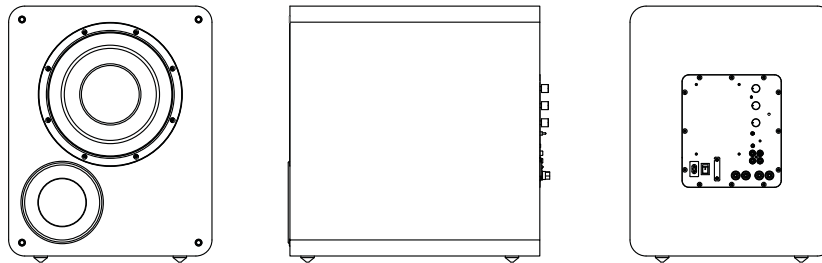

## SVS 10" High Output Woofer

- FEA-optimized motor technology for low distortion.
- Long-throw voice coil and suspension for high output at deep frequencies.
- Rubber surround for durability and long-life.

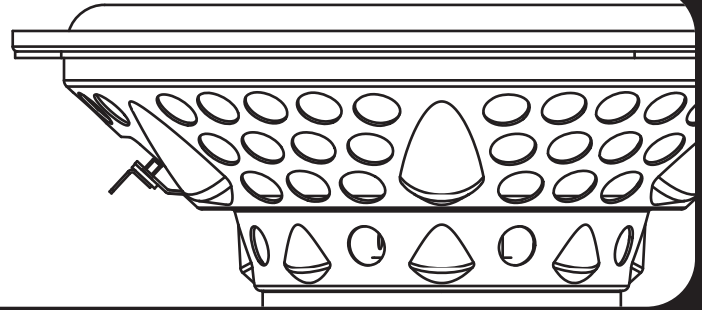

## Sledge Amplification – Intelligent and Sophisticated Power

- 300 watts of efficient, Class D power with 'green' (<0.5 watts consumption) standby mode.
- DSP control for accurate response and refined behavior under all operating conditions.
- Stereo line-level RCA Input & 80Hz High Pass Filtered Output connections.
- Stereo speaker level 5-way binding post input connections.
- Continuously variable low pass filter frequency with disable/LFE setting.
- Continuously variable volume and phase controls.

